


EASY COMBO EMERGENCY LIGHT OR EMERGENCY EXIT LIGHT TWTB152WA

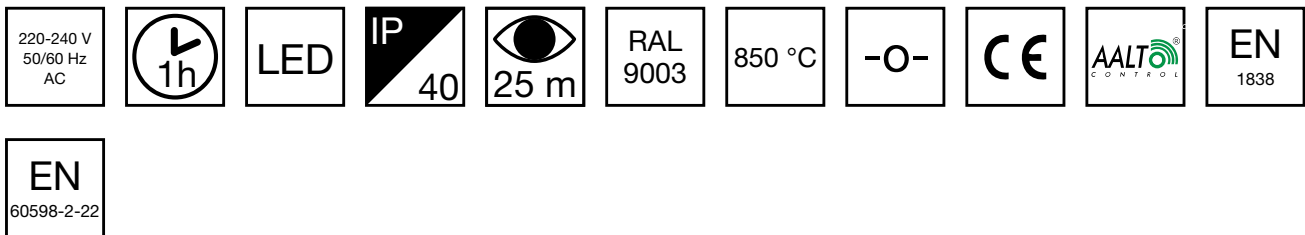

Self-contained Emergency / Exit Light with 1 h Battery and Aalto Ctrl Wireless Central Monitoring.

Teknoware Easy Combo is a combination light, which can be used as either an emergency or emergency exit light. When fitted with the rotatable sign, Combo can show the direction arrow pointing up, down, left or right. When Combo is used as an emergency light, the sign is not installed.

Easy Combo can easily be surface or semi-flush mounted thanks to its practical design. Easy's wide product family offers an ideal choice when you want a single fixture for your entire property's needs. Teknoware Easy Combo is a combination light, which can be used as either an emergency or emergency exit light. When fitted with the rotatable sign, Combo can show the direction arrow pointing up, down, left or right. When Combo is used as an emergency light, the sign is not installed.

Easy Combo can easily be surface or semi-flush mounted thanks to its practical design. Easy's wide product family offers an ideal choice when you want a single fixture for your entire

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

property's needs.

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](https://www.teknoware.com) | emexit@teknoware.com

INDIVIDUALLY PACKED LIGHTS

Product Code
YB152WA120

Product Code	TWTB152WA
Feature	Aalto Control
Mounting (standard)	wall, ceiling, surface, recess
Customs Code	94056080
GTIN Code	6438045024592
ETIM Product Class	EC001957
Length	265 mm
Width	137 mm
Height	53 mm
Weight	0.45 kg
Backup	1 h
Max Input Power VA	8 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	II
IP Class	IP40
Temperature Range Min - Max	-5...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Viewing Distance	25 m
Light Source	LED
Body Material	plastic
Colour	RAL9003
Electrical Installation	2/3 x 2,5 mm ²

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa




Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

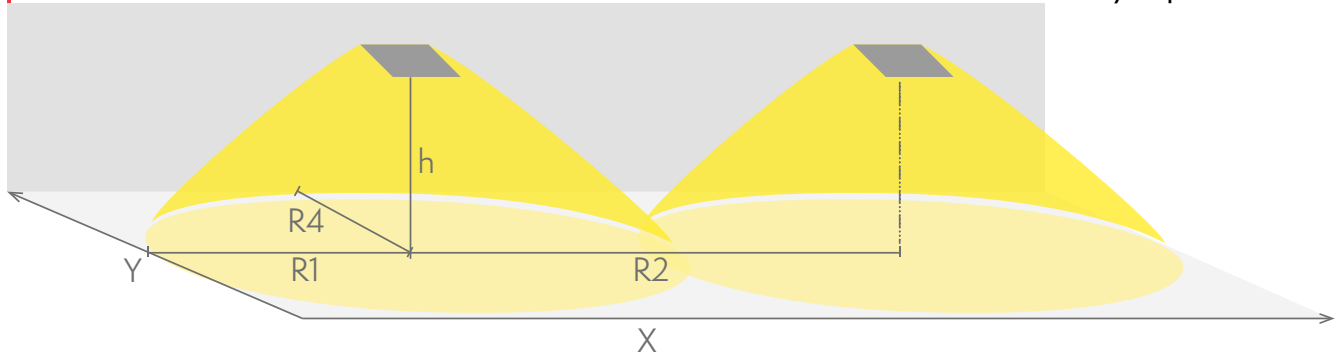

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWTB152WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	7	3	8	1
3	5	3	8.5	1
4	2.5	3	9.5	1

Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

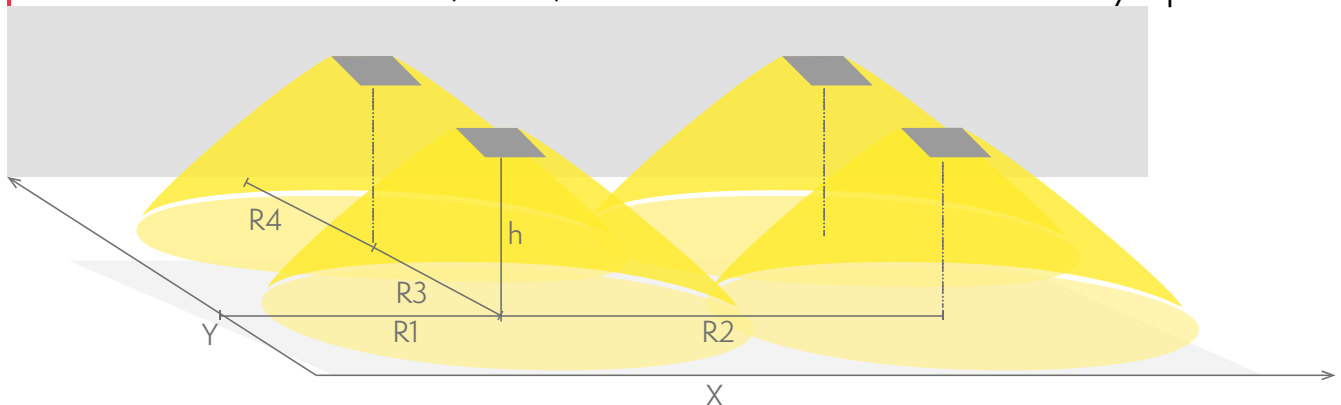

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



R1 distance from wall (X axis)
 R2 installation distance between lights (X axis)
 R3 installation distance between lights (Y axis)
 R4 distance from wall (Y axis)

TWTB152WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	7	3.5	7	7	3.5
3	5	3.5	7	7	3.5
4	2.5	3.5	7.5	7.5	3.5
6	1.2	4	8	8	4

OPTIONAL ACCESSORIES:

OTHER ACCESSORIES FOR EMERGENCY LIGHTS



Product Code	Product Name	Compatible Product Groups
TWTB110	Easy Combo IP54 gasket TWTB110	Other Accessories for Emergency Exit Lights

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS



Product Code	Product Name	Compatible Product Groups
TWTB101	Easy Combo recess mounting frame TWTB101	Easy: Combo Emergency / Exit Light, Easy Combo Emergency / Exit Light
TWTB103	Easy Combo flag bracket TWTB103	Easy: Combo Emergency / Exit Light, Easy Combo Emergency / Exit Light
TWTB104	Easy Combo ceiling bracket TWTB104	Easy: Combo Emergency / Exit Light, Easy Combo Emergency / Exit Light
TWTB105	Easy Combo suspension bracket TWTB105	Easy: Combo Emergency / Exit Light, Easy Combo Emergency / Exit Light

COMPATIBLE PRODUCTS:

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
 Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

PICTOGRAMS FOR EMERGENCY EXIT LIGHTS

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PBB100		25	

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.


Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

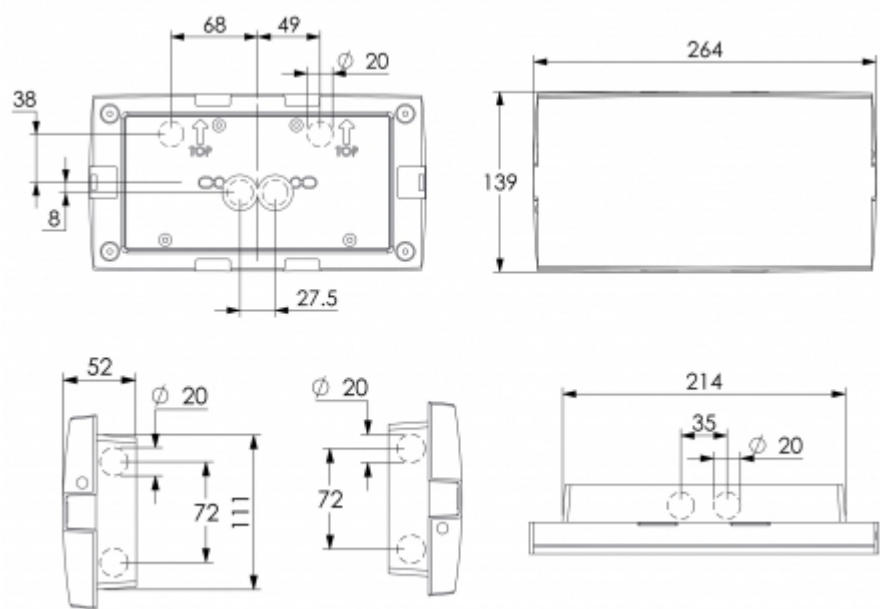

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting/easy-combo-emergency-light-or-emergency-exit-light-twtb152wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com