


# LINESPOT II LOWBAY EMERGENCY LIGHT

## TWS1492WM

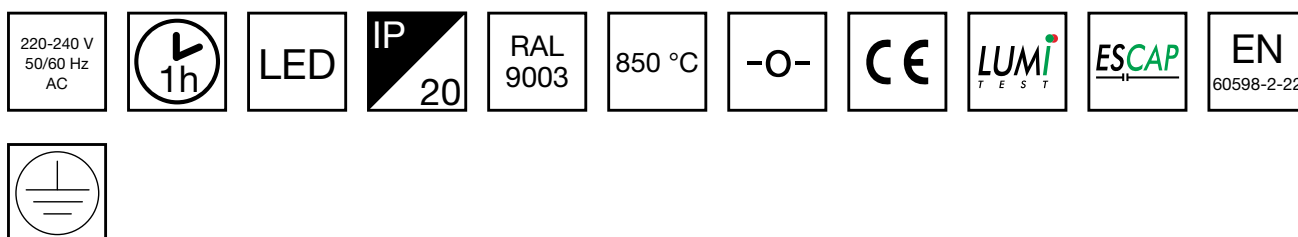

## Self-contained Escap Emergency light with 1 h Super Capacitor and Lumi Test Self-testing

The Linespot II Lowbay is a compact and stylish emergency light designed especially for corridor lighting. The luminaire is recess mounted; the size of the recess mounting aperture is Ø 75 mm. Linespot II Lowbay's design is an unobtrusive solution for energy-efficient emergency lighting.

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

[www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492wm](http://www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# INDIVIDUALLY PACKED LIGHTS

Product Code
Y1492WM

Product Code	TWS1492WM
Feature	Escap, Lumi Test
Mounting (standard)	recess
Customs Code	94056080
GTIN Code	6438045019093
ETIM Product Class	EC001957
Length	100 mm
Width	100 mm
Height	50 mm
Weight	0,8 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	plastic
Aperture for Recess Mounting	ø75 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm <sup>2</sup>

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

[www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492wm](http://www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492wm)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)

TWS1492WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	2,5	5	16	1
3	1,5	4,5	16,5	1

## OPTIONAL ACCESSORIES:

## OTHER ACCESSORIES FOR EMERGENCY LIGHTS



Product Code	Product Name	Compatible Product Groups
TMT389	Gasket ring TMT389	Linespot II: Lowbay, Recess-Mounted Emergency Lights, Zonespot II: Lowbay, Recess-Mounted Emergency Lights

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.


Date: July 22, 2022 | Source:

[www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492wm](http://www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492wm)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

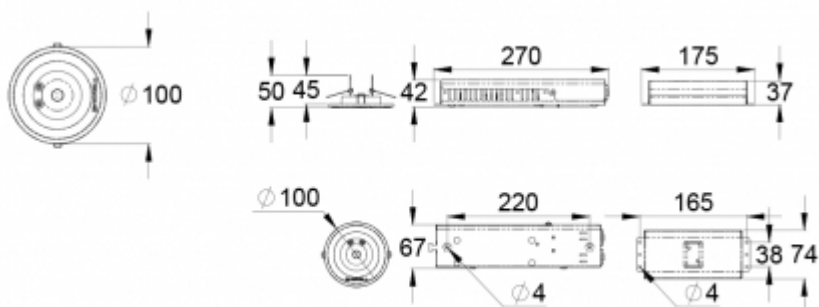

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

[www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492w](http://www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-tws1492w)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)