



Spot, narrow and medium beam angles are available for different lighting applications



NEKO / MIU / MIU-P S
Pendant Light

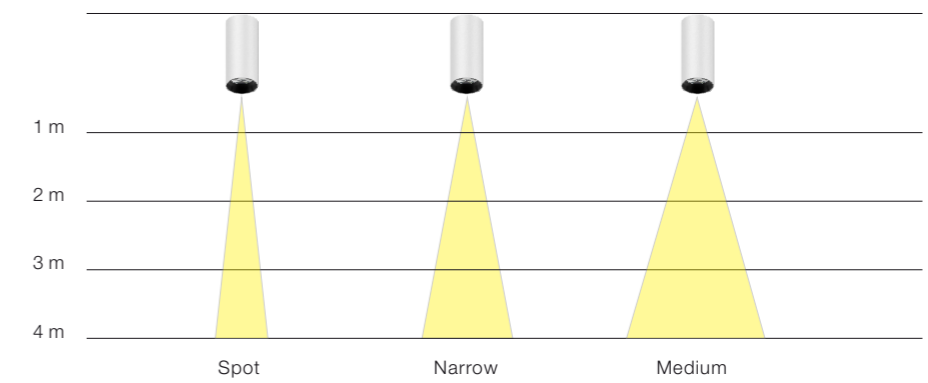

11W	CR183 CRI90	2700K 3000K 4000K	680lm 720lm 800lm	18°	24°	36°




Kurze Info

- Schönes Gehäusedesign mit integriertem LED-Treiber
- Beste Lichtatmosphäre für angenehmen und blendfreien Sehkomfort
- Design mit Twist-Lock-Mechanismus, einfache installation

Short Info

- Ultra-slim housing design with internal LED driver
- Excellent optical performance with maximum eye comfort
- Twist-lock mechanism design, simple installation

Features

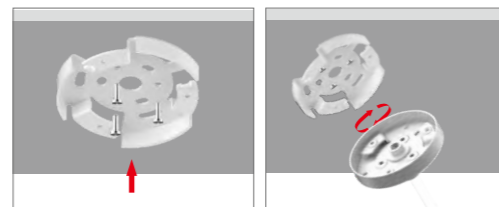

- Ceiling installation plate fixed by screws
- Twist and lock system between housing and ceiling installation plate

Order Information



MIU-P S-11W

CITIZEN LED powered by 260mA constant current internal LED driver, White housing


Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	BEAM	LED output	System output	Code
MIU-P S-11W-930-18D	9 W	11 W	36 V	260 mA	90	3000K	18°	950 lm	720 lm	L2031C7W(X)
MIU-P S-11W-940-18D	9 W	11 W	36 V	260 mA	90	4000K	18°	1050 lm	800 lm	L2031C8W(X)
MIU-P S-11W-930-24D	9 W	11 W	36 V	260 mA	90	3000K	24°	950 lm	720 lm	L2031G7W(X)
MIU-P S-11W-940-24D	9 W	11 W	36 V	260 mA	90	4000K	24°	1050 lm	800 lm	L2031G8W(X)
MIU-P S-11W-930-36D	9 W	11 W	36 V	260 mA	90	3000K	36°	950 lm	720 lm	L203137W(X)
MIU-P S-11W-940-36D	9 W	11 W	36 V	260 mA	90	4000K	36°	1050 lm	800 lm	L203138W(X)

Remark: X= F(ON-OFF)

Version




Optional accessory

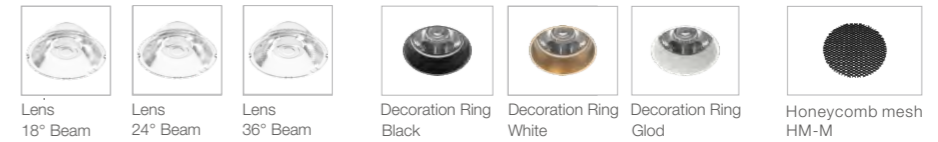

Light Distribution

3000K

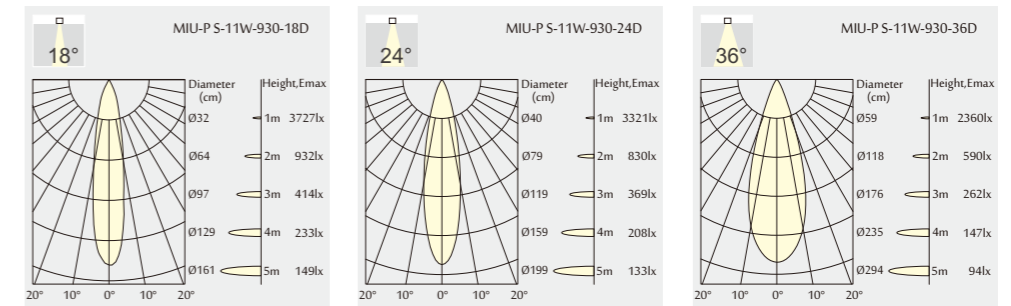


For more info see: www.nekolighting.com



NEKO / MIU / MIU-P M
Pendant Light



21W 15W	CRI83 CRI90	2700K 3000K 4000K	1500lm 1600lm 1700lm	15°	25°	30°



Kurze Info

- Funktionales Gehäusedesign mit integriertem LED-Treiber
- Beste Lichtatmosphäre für angenehmen und blendfreien Sehkomfort
- Design mit Twist-Lock-Mechanismus, einfache installation

Short Info

- Elegant housing design with internal LED driver
- Excellent optical performance with maximum eye comfort
- Twist-lock mechanism design, simple installation

Features



- Ceiling installation plate fixed by screws
- Twist and lock system between housing and ceiling installation plate

Order Information



MIU-P M-15W

CITIZEN LED powered by 350mA constant current internal LED driver, White housing

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	BEAM	LED output	System output	Code
MIU-P M-15W-930-15D	13 W	15 W	36 V	350 mA	90	3000K	15°	1500 lm	1200 lm	L2041B7W(X)
MIU-P M-15W-940-15D	13 W	15 W	36 V	350 mA	90	4000K	15°	1600 lm	1300 lm	L2041B8W(X)
MIU-P M-15W-930-25D	13 W	15 W	36 V	350 mA	90	3000K	25°	1500 lm	1200 lm	L2041D7W(X)
MIU-P M-15W-940-25D	13 W	15 W	36 V	350 mA	90	4000K	25°	1600 lm	1300 lm	L2041D8W(X)
MIU-P M-15W-930-30D	13 W	15 W	36 V	350 mA	90	3000K	30°	1500 lm	1200 lm	L204127W(X)
MIU-P M-15W-940-30D	13 W	15 W	36 V	350 mA	90	4000K	30°	1600 lm	1300 lm	L204128W(X)



MIU-P M-21W

CITIZEN LED powered by 500mA constant current internal LED driver, White housing

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	BEAM	LED output	System output	Code
MIU-P M-21W-930-15D	18 W	21 W	36 V	500 mA	90	3000K	15°	2000 lm	1600 lm	L2042B7W(X)
MIU-P M-21W-940-15D	18 W	21 W	36 V	500 mA	90	4000K	15°	2100 lm	1700 lm	L2042B8W(X)
MIU-P M-21W-930-25D	18 W	21 W	36 V	500 mA	90	3000K	25°	2000 lm	1600 lm	L2042D7W(X)
MIU-P M-21W-940-25D	18 W	21 W	36 V	500 mA	90	4000K	25°	2100 lm	1700 lm	L2042D8W(X)
MIU-P M-21W-930-30D	18 W	21 W	36 V	500 mA	90	3000K	30°	2000 lm	1600 lm	L204227W(X)
MIU-P M-21W-940-30D	18 W	21 W	36 V	500 mA	90	4000K	30°	2100 lm	1700 lm	L204228W(X)

Remark: X= F (ON-OFF)

Version



Black

White

Optional accessory



Lens
15° Beam

Lens
25° Beam

Lens
30° Beam

Decoration Ring
Black


Decoration Ring
White

Decoration Ring
Glod

Honeycomb mesh
HM-M

Light Distribution


3000K

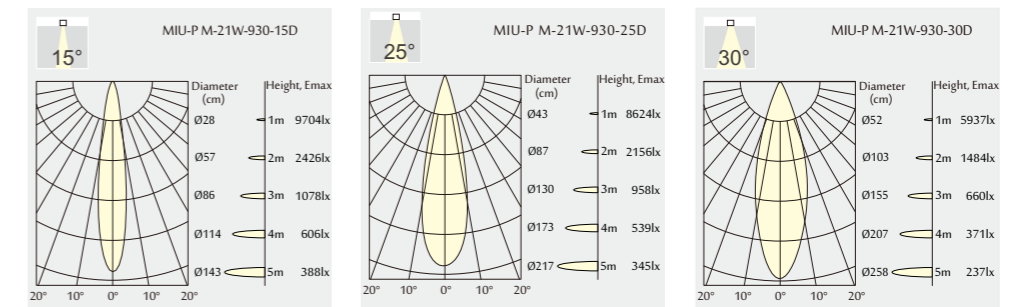

NEKO / MIU / MIU-P L
Pendant Light



28W	CR183 CRI90	2700K 3000K 4000K	2500lm 2700lm 2900lm	18°	30°	45°
CITIZEN 50,000h@L80	IP20	UGR < 19	5 YEAR WARRANTY	CB	CE	




Kurze Info

- Funktionales Gehäusedesign mit integriertem LED-Treiber
- Beste Lichtatmosphäre für angenehmen und blendfreien Sehkomfort
- Design mit Twist-Lock-Mechanismus, einfache installation

Short Info

- Functional housing design with internal LED driver
- Excellent optical performance with maximum eye comfort
- Twist-lock mechanism design, simple installation

Features

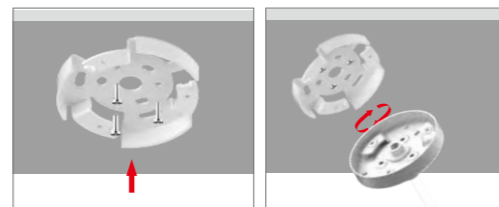

- Ceiling installation plate fixed by screws
- Twist and lock system between housing and ceiling installation plate

Order Information



MIU-P L-28W

CITIZEN LED powered by 700mA constant current internal LED driver, White housing

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	BEAM	LED output	System output	Code
MIU-P L-28W-930-18D	25 W	28 W	36 V	700 mA	90	3000K	18°	3400 lm	2700 lm	L2051C7W(X)
MIU-P L-28W-940-18D	25 W	28 W	36 V	700 mA	90	4000K	18°	3600 lm	2900 lm	L2051C8W(X)
MIU-P L-28W-930-30D	25 W	28 W	36 V	700 mA	90	3000K	30°	3400 lm	2700 lm	L205127W(X)
MIU-P L-28W-940-30D	25 W	28 W	36 V	700 mA	90	4000K	30°	3600 lm	2900 lm	L205128W(X)
MIU-P L-28W-930-45D	25 W	28 W	36 V	700 mA	90	3000K	45°	3400 lm	2700 lm	L205177W(X)
MIU-P L-28W-940-45D	25 W	28 W	36 V	700 mA	90	4000K	45°	3600 lm	2900 lm	L205178W(X)

Remark: X= F(ON-OFF)

Version



Black

White

Optional accessory



Lens
18° Beam



Lens
30° Beam



Lens
45° Beam



Decoration Ring
Black



Decoration Ring
White






Decoration Ring
Glod



Honeycomb mesh
HM-M

Light Distribution

3000K

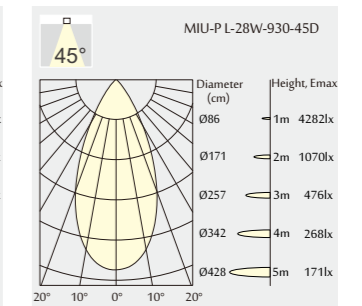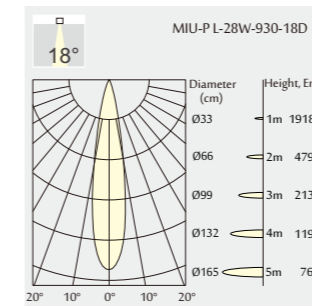

For more info see: www.nekolighting.com