
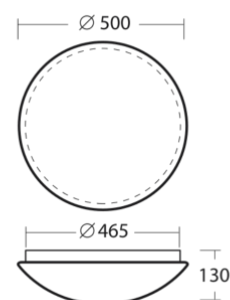


TITAN 3 - PC

Dimensions:	ø 500 mm
Color:	white
Type:	wall or ceiling mounted
Shade:	opal polycarbonate (PC)
Shade attach.:	two-step clamp holders
Fixture:	powder coated steel sheet
Equipment:	STANDARD, LED

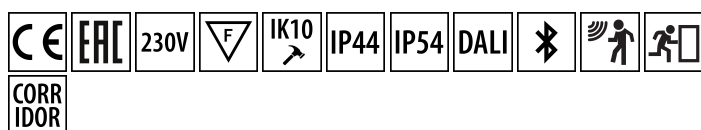

Standard

Code	Type	IP	Source	Input [W]	Socket	T [h]	m [kg]	Warranty [month]
Classic								
56024	IN-32KN94/PC09	IP44		3x60	3xE27		2,0	24
44640	E-26KN94/PC09 32W	IP44		2x32	2xGX24q3		2,1	24
56025	E-27KN94/PC09	IP44		2x36	2xG10		2,1	24
Sensor								
46131	IN-32KN94/PC09 HF	IP44		3x40	3xE27		2,1	24
Emergency combined								
44642	NKC-232/16/PC09	IP44		2x32	2xGX24q3	1	2,5	24

LED

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
Classic									
56234	LED-2L43C07KN94/PC09 3000	IP54	3000	37	5050	3330		2,8	60
56238	LED-2L43C10KN94/PC09 3000	IP54	3000	56	7250	4790		2,8	60
56734	LED-2L43C07KN94/PC09 4000	IP54	4000	37	5330	3520		2,8	60
56738	LED-2L43C10KN94/PC09 4000	IP54	4000	56	7640	5050		2,8	60
Sensor									
56235	LED-2L43C07KN94/PC09 HF 3000	IP54	3000	37	5050	3330		2,8	60
56239	LED-2L43C10KN94/PC09 HF 3000	IP54	3000	56	7250	4790		2,8	60
56735	LED-2L43C07KN94/PC09 HF 4000	IP54	4000	37	5330	3520		2,8	60
56739	LED-2L43C10KN94/PC09 HF 4000	IP54	4000	56	7640	5050		2,8	60
Dimmable									
56236	LED-2L43C07KN94/PC09 DALI 3000	IP54	3000	37	5050	3330		2,8	60

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
56240	LED-2L43C10KN94/PC09 DALI 3000	IP54	3000	56	7250	4790		2,8	60
56736	LED-2L43C07KN94/PC09 DALI 4000	IP54	4000	37	5330	3520		2,8	60
56740	LED-2L43C10KN94/PC09 DALI 4000	IP54	4000	56	7640	5050		2,8	60
Emergency combined									
56242	LED-2L43C07KN94/PC09/NK1W 3000	IP54	3000	37	5050	3330	3	2,8	60
56243	LED-2L43C10KN94/PC09/NK1W 3000	IP54	3000	56	7250	4790	3	2,8	60
56742	LED-2L43C07KN94/PC09/NK1W 4000	IP54	4000	37	5330	3520	3	2,8	60
56743	LED-2L43C10KN94/PC09/NK1W 4000	IP54	4000	56	7640	5050	3	2,8	60
Corridor									
56237	LED-2L43C07KN94/PC09 DALI HF CORR 3000	IP54	3000	37	5050	3330		2,8	60
56241	LED-2L43C10KN94/PC09 DALI HF CORR 3000	IP54	3000	56	7250	4790		2,8	60
56737	LED-2L43C07KN94/PC09 DALI HF CORR 4000	IP54	4000	37	5330	3520		2,8	60
56741	LED-2L43C10KN94/PC09 DALI HF CORR 4000	IP54	4000	56	7640	5050		2,8	60