
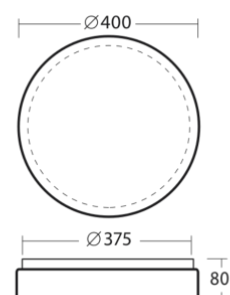


DELIA 2 - PC

Dimensions:	ø 400 mm
Color:	white
Type:	wall or ceiling mounted
Shade:	opal polycarbonate (PC)
Shade attach.:	two-step clamp holders
Fixture:	powder coated steel sheet
Equipment:	STANDARD, LED

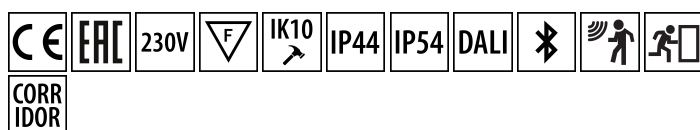

Standard

Code	Type	IP	Source	Input [W]	Socket	T [h]	m [kg]	Warranty [month]
Classic								
56110	IN-22KN83/PC23	IP44		2x40	2xE27		1,4	24
56112	E-26KN83/PC23	IP44		2x26	2xG24q3		1,7	24
Sensor								
56116	IN-22KN83/PC23 HF	IP44		2x40	2xE27		1,5	24
Emergency combined								
56119	NKC-226/13/PC23	IP44		2x26	2xG24q3	1	2,0	24

LED

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
Classic									
56300	LED-1L16C07KN83/PC23 3000	IP54	3000	28	3690	2580		1,8	60
53337	LED-1L16B07KN83/PC23 3000	IP54	3000	36	4850	3400		1,8	60
56800	LED-1L16C07KN83/PC23 4000	IP54	4000	28	3890	2720		1,8	60
53837	LED-1L16B07KN83/PC23 4000	IP54	4000	36	5070	3550		1,8	60
Sensor									
56301	LED-1L16C07KN83/PC23 HF 3000	IP54	3000	28	3690	2580		1,8	60
53343	LED-1L16B07KN83/PC23 HF 3000	IP54	3000	36	4850	3400		1,8	60
56801	LED-1L16C07KN83/PC23 HF 4000	IP54	4000	28	3890	2720		1,8	60
53843	LED-1L16B07KN83/PC23 HF 4000	IP54	4000	36	5070	3550		1,8	60
Dimmable									
56302	LED-1L16C07KN83/PC23 DALI 3000	IP54	3000	28	3690	2580		1,8	60
53341	LED-1L16B07KN83/PC23 DALI 3000	IP54	3000	36	4850	3400		1,8	60

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
56802	LED-1L16C07KN83/PC23 DALI 4000	IP54	4000	28	3890	2720		1,8	60
53841	LED-1L16B07KN83/PC23 DALI 4000	IP54	4000	36	5070	3550		1,8	60
Emergency combined									
56305	LED-1L16C07KN83/PC23/NK1W 3000	IP54	3000	28	3690	2580	3	1,8	60
53345	LED-1L16B07KN83/PC23/NK1W 3000	IP54	3000	36	4850	3400	3	1,8	60
56805	LED-1L16C07KN83/PC23/NK1W 4000	IP54	4000	28	3890	2720	3	1,8	60
53845	LED-1L16B07KN83/PC23/NK1W 4000	IP54	4000	36	5070	3550	3	1,8	60
Emergency combined + sensor									
56306	LED-1L16C07KN83/PC23/NK1W HF 3000	IP54	3000	28	3690	2520	3	1,8	60
56307	LED-1L16B07KN83/PC23/NK1W HF 3000	IP54	3000	36	4850	3400	3	1,8	60
56806	LED-1L16C07KN83/PC23/NK1W HF 4000	IP54	4000	28	3890	2720	3	1,8	60
56807	LED-1L16B07KN83/PC23/NK1W HF 4000	IP54	4000	36	5070	3550	3	1,8	60
Two-circuits									
53339	LED-1L16B07KN83/PC23 2/1 3000	IP54	3000	36	4850	3400		1,8	60
53839	LED-1L16B07KN83/PC23 2/1 4000	IP54	4000	36	5070	3550		1,8	60
Corridor									
56303	LED-1L16C07KN83/PC23 DALI HF CORR 3000	IP54	3000	28	3690	2580		1,8	60
56304	LED-1L16B07KN83/PC23 DALI HF CORR 3000	IP54	3000	36	4850	3400		1,8	60
56803	LED-1L16C07KN83/PC23 DALI HF CORR 4000	IP54	4000	28	3890	2720		1,8	60
56804	LED-1L16B07KN83/PC23 DALI HF CORR 4000	IP54	4000	36	5070	3550		1,8	60