

TUPOLI Suspended 55 LED 41W 4000K Frost 2586mm

DESCRIPTION

- Luminaire with direct luminous flux distribution, opal polycarbonate diffuser and aluminium body e no finishing.





MAIN FEATURES

| | |
|----------------------|---------------------|
| Volume (dm3) | 3.1 |
| Weight (Kg) | 3.1 |
| Glow-wire Resistance | 850°C |
| Input | 220-240V~/50-60Hz |
| Control | ON/OFF Power Supply |

TECHNICAL FEATURES

| | |
|-----------------------------|-------------------|
| Luminous Flux Maintenance | L80 |
| MAX Power (W) | |
| Maximum Value (cd/Klm) | 260 |
| % ULOR | 12 |
| % DLOR | 88 |
| % LOR | 100 |
| Color Rendering Index (CRI) | >80 |
| LED Degradation/Mortality | B10 |
| Lifetime | 72.000H @Tc=80°C |
| MacAdam Ellipse | 3 |
| Total Flux (lm) | 5643 |
| System Power (W) | 41 |
| Color Temperature | 4000K |
| Ambient Temperature (Ta) | -20°C - +35°C |
| Luminous Flux (lm/m) | |
| LED Efficiency | 197 lm/W @Tc=65°C |

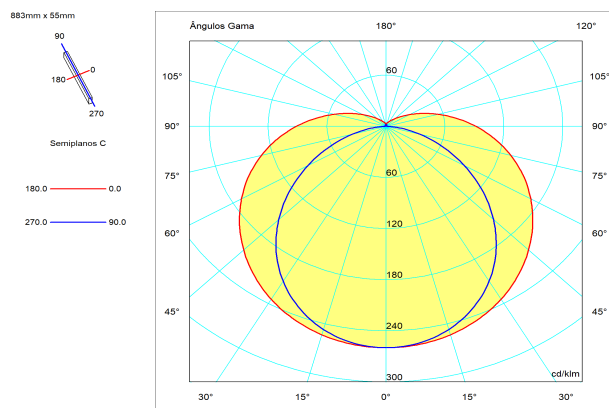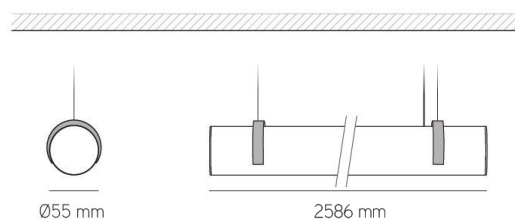

STANDARDS

DIRECTIVE 2011/65/EU of 8 June 2011 + COMMISSION DELEGATED DIRECTIVE (EU) 2015/863 of 31 March 2015 RoHS2
DIRECTIVE 2014/30/EU of 26 February 2014
EN 50581:2012 | EN 55015:2006+A1:2007+A2:2009 | EN 60335-1:2012 | EN 60598-1: 2014 | EN 60598-2-1: 1990 | EN 60598-2-13: 2006 | EN 60598-2-2: 2014 | EN 60598-2-22: 2014 | EN 60598-2-25: 2009 | EN 60598-2-4: 2017 | EN 61000-4-2:2009;EN 61000-4-3:2006 + A1:2008;EN 61000-4-4:2004;EN 61000-4-5:2006;EN 61000-4-6:2009 | EN 61547:2009
LOW VOLTAGE DIRECTIVE 2014/35/EU of 26 February 2014

