







The luminaire can be used only as ceiling.

- check, if the electrical supply is switched off
- loosen the detent screw and dislocate the upper cover down (1)
- adjust the wire length according to your needs(2)
- hang the ring lug on the hook (3)
- connect the input conductors in the terminal block (4)
- move the upper cover to the ceiling and tighten the detent screw (5)
- loosen the detent screw on the lower cover (6)
- loosen the cable grommet (7)
- lift the cover (8) and lightly tighten the detent screw
- install the light source (according to the type- slip the fluorescent lamps or screw the lamp source into E27) (9)
- put the shade on (10)
- loosen the detent screw, move the lower cover on the shade and tighten again the screw (11)



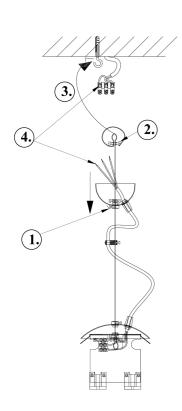

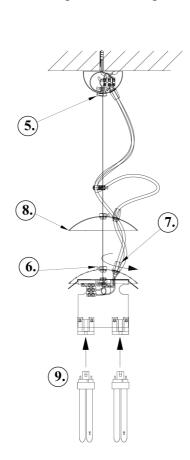

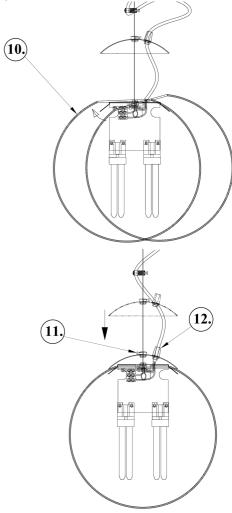

Electrical installation and safety:

Generally it is necessary to follow the EU regulations. At any revisions or service activity it is necessary to disconnect lighting fitting from the electrical network. Only qualified and experienced personnel must undertake this work

www.osmont.cz