

LED Round surface panel



Round LED panel for surface or suspended (with accessory: 4 steel towline, several measures, please consult).

Body: First quality aluminium, electrostatic paint in white polyester, stable to ultraviolet rays.

Wiring: As required on UNE-EN 60598 and also accomplishing the exigencies about electromagnetic compatibility and Electric Security (CE marked).

Driver from TRIDONIC



Optic component: Opal polycarbonate diffuser

With LUMENMAX LEDs

Color:
White



Reference	LED	N° of LEDs	CRI (Ra)	DRIVER Cos.λ Efficiency	Temperature (k)	Angle	VDC	W	LUMENS	LIFE
IRD-2455	Lumenmax SDM 2835	240 uds	≥ 80	0.96	> 90	120°	29/33v	48w	3.500 Lm	50.000 H

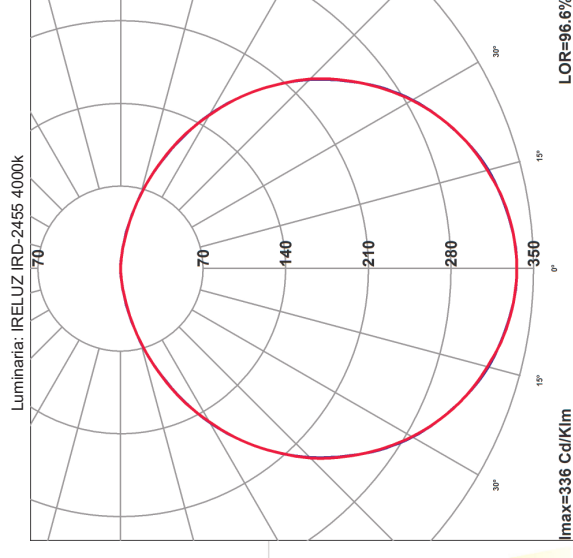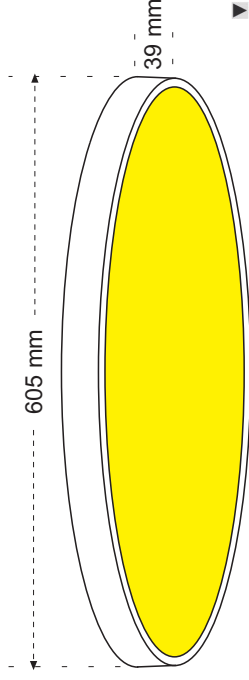

▼ H	▼ Ø	▼ LUX	114°
1	3.1	1288	
2	6.1	322	
3	9.2	143	
4	12.2	81	
5	15.3	52	