








DESCRIPTION


Lighting fixture with direct / indirect luminous flux distribution, aluminum housing and ral 9003 matt white finish.

FEATURES

-  Pendant
-  E14/LED
-  Lamp Included
- IP20** General
-  960°C Glow-wire Resistance
-  2014/30/EU, 2014/35/EU
-  202.6 dm³

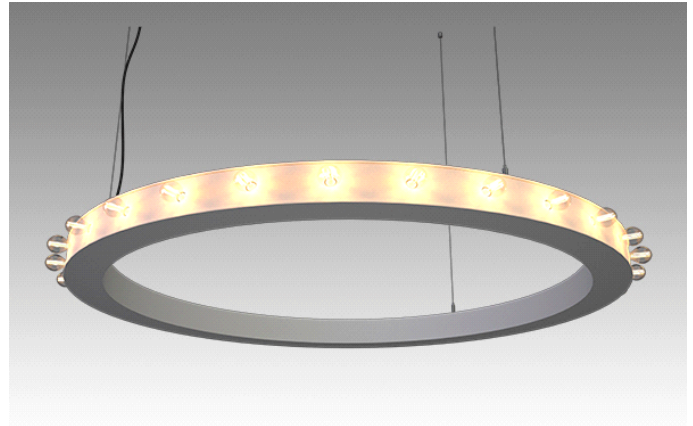


ELECTRICAL SYSTEM

- U_{IN}** 230V/50Hz
- ON/OFF** On/Off Power Supply
-  Class I

LED FEATURES

- 2700K** Colour Temperature
- 118 Lm/W @TC=25°C** LED Efficacy
- 20.000H @TC=25°C** Lifetime
- L70** Luminous Flux Maintenance

DIMENSIONS

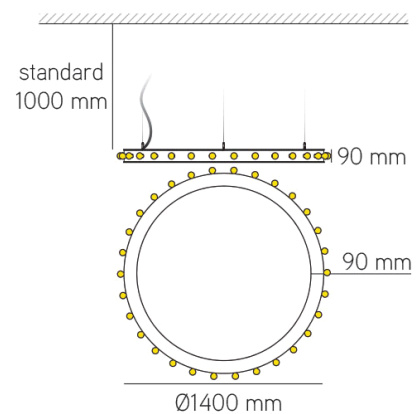

COMPONENTS



35.06.40.001634

S1 - Suspension 3 point
(1m) White



35.06.40.001635

S2 - Suspension 3
point (1m) + ceiling cup
White



35.06.40.001636

S3 - Suspension 1 point
(1m) + ceiling cup White

ENERGY EFFICIENCY

