



TITAN 1A - PMMA

Dimensions:	ø 220 mm
Color:	white
Type:	wall or ceiling mounted
Shade:	opal polymethylmetacrylate (PMMA)
Shade attach.:	two-step clamp holders
Fixture:	powder coated steel sheet
Equipment:	STANDARD, LED

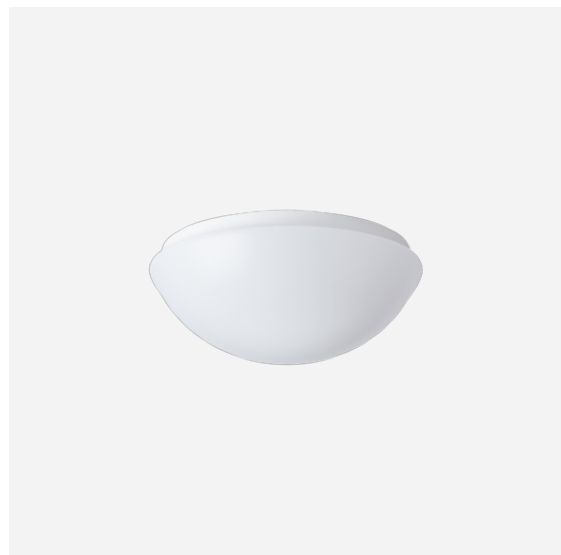

Standard

Code	Type	IP	Source	Input [W]	Socket	T [h]	m [kg]	Warranty [month]
Classic								
56053	IN-12KN32/PM03	IP44		40	E27		0,5	24
Sensor								
52111	IN-12KN32/PM03 HF	IP44		30	E27		0,5	24

LED

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
Classic									
53233	LED-1L12B07KN32/PM03 3000	IP54	3000	11	1290	940		0,7	60
53733	LED-1L12B07KN32/PM03 4000	IP54	4000	11	1350	990		0,7	60
56203	LED-1L12C03KN32/PM03 3000	IP54	3000	9	1080	790		0,7	60
56703	LED-1L12C03KN32/PM03 4000	IP54	4000	9	1140	830		0,7	60
Emergency									
49005	LED-NZ1W/PM03 4000	IP54	4000	1	150	110	3	1,1	60
Sensor									
56204	LED-1L12C03KN32/PM03 HF 3000	IP54	3000	9	1080	790		0,7	60
56205	LED-1L12B07KN32/PM03 HF 3000	IP54	3000	11	1290	940		0,7	60
56704	LED-1L12C03KN32/PM03 HF 4000	IP54	4000	9	1140	830		0,7	60
56705	LED-1L12B07KN32/PM03 HF 4000	IP54	4000	11	1350	990		0,7	60