



TRITON 2

Dimensions:	ø 360 mm
Color:	white
Type:	wall or ceiling mounted
Shade:	opal polycarbonate (PC)
Shade attach.:	bayonet, a possibility of securing shade with a screw
Fixture:	polycarbonate molding
Equipment:	STANDARD, LED

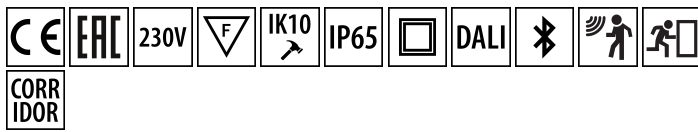

Standard

Code	Type	IP	Source	Input [W]	Socket	T [h]	m [kg]	Warranty [month]
Classic								
50090	IN-184 B	IP65 II		2x25	2xE27		1,3	24
50092	E-185/226 B	IP65		2x26	2xG24q3		1,4	24
Sensor								
50095	IN-184 B HF	IP65		40	2xE27		1,4	24
Dimmable								
50094	ES-185/226 B DALI	IP65		2x26	2xG24q3		1,4	24

LED

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
Classic									
57216	LED-1L15C07/IN-184 B 3000	IP65	3000	21	2770	2270		1,4	60
50161	LED-1L15B07/IN-184 B 3000	IP65	3000	29	3880	3180		1,5	60
57716	LED-1L15C07/IN-184 B 4000	IP65	4000	21	2920	2390		1,4	60
50661	LED-1L15B07/IN-184 B 4000	IP65	4000	29	4050	3320		1,5	60
Sensor									
57217	LED-1L15C07/IN-184 B HF 3000	IP65	3000	21	2770	2270		1,4	60
50165	LED-1L15B07/IN-184 B HF 3000	IP65	3000	29	3880	3180		1,6	60
57717	LED-1L15C07/IN-184 B HF 4000	IP65	4000	21	2920	2390		1,4	60
50665	LED-1L15B07/IN-184 B HF 4000	IP65	4000	29	4050	3320		1,6	60
Dimmable									
57218	LED-1L15C07/IN-184 B DALI 3000	IP65	3000	21	2770	2270		1,4	60
50163	LED-1L15B07/IN-184 B DALI 3000	IP65	3000	29	3880	3180		1,5	60

Code	Type	IP	CCT [K]	Input [W]	Lum. flux of LED [lm]	Lum. flux of luminaire [lm]	T [h]	m [kg]	Warranty [month]
57718	LED-1L15C07/IN-184 B DALI 4000	IP65	4000	21	2920	2390		1,4	60
50663	LED-1L15B07/IN-184 B DALI 4000	IP65	4000	29	4050	3320		1,5	60
Emergency combined									
50167	LED-1L15B07/IN-184/NK1W B 3000	IP65	3000	29	3880	3180	3	1,7	60
57221	LED-1L15C07/IN-184/NK1W B 3000	IP65	3000	21	2770	2270	3	1,4	60
57721	LED-1L15C07/IN-184/NK1W B 4000	IP65	4000	21	2920	2390	3	1,4	60
50667	LED-1L15B07/IN-184/NK1W B 4000	IP65	4000	29	4050	3320	3	1,7	60
Emergency combined + sensor									
57222	LED-1L15C07/IN-184/NK1W B HF 3000	IP65	3000	21	2770	2270	3	1,4	60
50169	LED-1L15B07/IN-184/NK1W B HF 3000	IP65	3000	29	3880	3180	3	1,8	60
57722	LED-1L15C07/IN-184/NK1W B HF 4000	IP65	4000	21	2920	2390	3	1,4	60
50669	LED-1L15B07/IN-184/NK1W B HF 4000	IP65	4000	29	4050	3320	3	1,8	60
Two-circuits									
50162	LED-1L15B07/IN-184 B 2/1 3000	IP65	3000	29	3880	3180		1,5	60
50662	LED-1L15B07/IN-184 B 2/1 4000	IP65	4000	29	4050	3320		1,5	60
Corridor									
57219	LED-1L15C07/IN-184 B DALI HF CORR 3000	IP65	3000	21	2770	2270		1,4	60
57220	LED-1L15B07/IN-184 B DALI HF CORR 3000	IP65	3000	29	3880	3180		1,5	60
57719	LED-1L15C07/IN-184 B DALI HF CORR 4000	IP65	4000	21	2920	2390		1,4	60
57720	LED-1L15B07/IN-184 B DALI HF CORR 4000	IP65	4000	29	4050	3320		1,5	60