



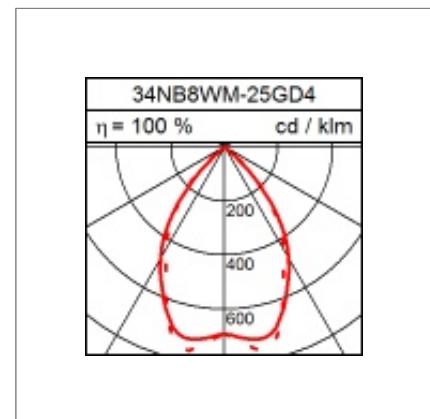

Technical Data

Ceiling mounted LED luminaire PIXEL DALI

19.7W LED, 1668 Lumen, 4000 Kelvin. IP30. Satinated acrylic glass. Smoothed aluminium. Asymmetric light distribution. Aluminium casted housing for ceiling montage. With electronic ballast.

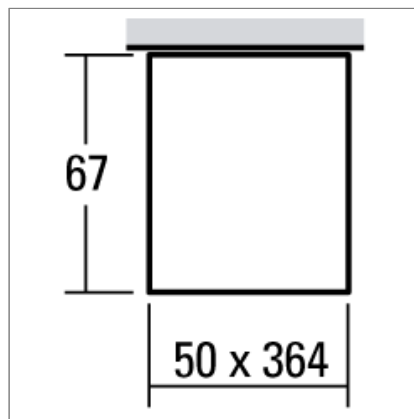

Product data

Item number	34NB8WM-25GD4
Dimensions	
Lamp	LED
Equipment	25.7W
System output	19.7W
Ballast	
Assemblypoints Distance	
Weight	
Safety signs	IP30   CE

Light data

Optical Light Output Ratio	100 %
Light direct/non direct Ratio	100 % / 0 %
Absolute luminous flux	1668 lm
Lightoutput (lm/W)	84.67

Glare rating UGR

X=4H, Y=8H, S=0,25H
Deg. of reflection 70/50/20

Perpendicular Zero	21.0
Perpendicular Ninety	21.3