



Recessed **LED** round panel

Recessed round LED panel for plaster ceilings.

Body: First quality aluminium, electrostatic paint in white polyester, stable to ultraviolet rays.

Wiring: As required on UNE-EN 60598 and also accomplishing the exigencies about electromagnetic compatibility and Electric Security (CE marked).

Driver from TRIDONIC

Optic component: Opal polycarbonate diffuser



With Edison SMD LEDs chips



Color:
white



| Reference | LEDs | N° of LEDs | CRI (Ra) | DRIVER | | Temperature (k) | Angle | VDC | W | LUMENS | LIFE |
|-----------|--------------------|------------|----------|---------------|------------|-----------------|-------|--------|-----|----------|----------|
| | | | | Cos λ | Efficiency | | | | | | |
| IRD-2465 | EDISON SDM 2835 | 240 uds | ≥ 80 | 0.96 | > 90 | 4000k | 120° | 29/33v | 48w | 3.500 Lm | 50.000 H |

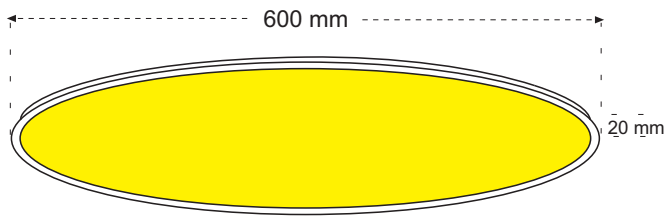

Cut
585 mm.

| H | ∅ | LUX | 114° |
|---|------|------|------|
| 1 | 3.1 | 1288 | |
| 2 | 6.1 | 322 | |
| 3 | 9.2 | 143 | |
| 4 | 12.2 | 81 | |
| 5 | 15.3 | 52 | |

