


TRAIL LINE LOWBAY EMERGENCY LIGHT TWSC192WA

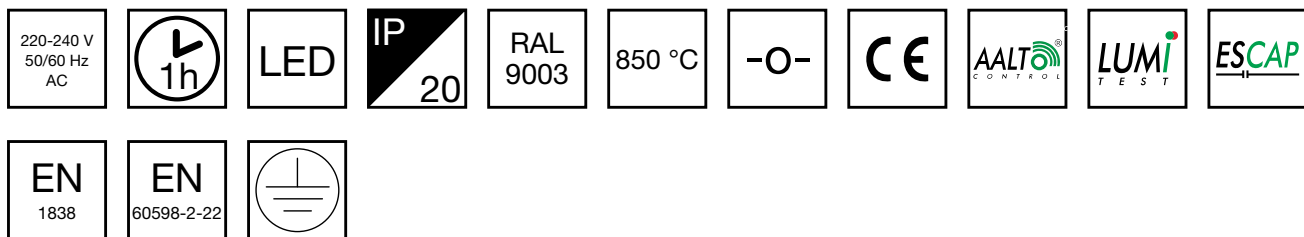

Self-contained Escap Emergency light with 1 h super capacitor and wireless central monitoring

Teknoware Trail is an elegant emergency light that is easy to install on a lighting track. Thanks to its unique design, it is suitable for direct mounting on common lighting track systems. The luminaire can also be mounted directly on the ceiling. Trail has a modern and streamlined appearance so it blends in with the surroundings and architecture. Trail's wide product family and range of optics offer many options to suit a variety of applications and systems.

Trail Line Lowbay is particularly suitable for low spaces. The luminaire provides a long and narrow pattern that illuminates the escape routes efficiently. Teknoware Trail is an elegant emergency light that is easy to install on a lighting track. Thanks to its unique design, it is suitable for direct mounting on common lighting track systems. The luminaire can also be mounted directly on the ceiling. Trail has a modern and streamlined appearance so it blends in with the surroundings and architecture. Trail's wide product family and range of optics offer many options to suit a variety of applications and systems.

Trail Line Lowbay is particularly suitable for low spaces. The luminaire provides a long and narrow pattern that illuminates the escape routes efficiently.

| | |
|-------------------------------------|---------------------------------|
| Product Code | TWSC192WA |
| Feature | Aalto Control, Escap, Lumi Test |
| Mounting (standard) | ceiling, surface, rail |
| Customs Code | 94056080 |
| GTIN Code | 6438045025346 |
| Length | 465 mm |
| Width | 80 mm |
| Height | 48 mm |
| Weight | 1,6 kg |
| Backup | 1 h |
| Max Input Power VA | 3 VA |
| Nominal Supply Voltage | 220-240 V, 50/60 Hz AC |
| Protection Class | I |
| IP Class | IP20 |
| Temperature Range Min - Max | -25...+35 °C |
| Glow Wire Test of Plastic Materials | 850 °C |
| Light Source | LED |
| Body Material | metal |
| Colour | RAL9003 |
| Electrical Installation | 3 x 2,5 mm ² |
| Luminous Flux | 75 lm |

Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)

TWSC192WA

| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|
| | | 1 lux | 1 lux | 1 lux |
| 2,5 | 2,5 | 5 | 16 | 1 |
| 3 | 1,5 | 4,5 | 16,5 | 1 |

OPTIONAL ACCESSORIES:

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

| Product Code | Product Name | Compatible Product Groups |
|--------------|-----------------------------|---------------------------|
| TWTC1002 | Trail wall bracket TWTC1002 | |

We reserve the rights to make modifications without notice.

Copyright © 2022 Teknoware. All rights reserved.

Date: July 22, 2022 | Source:

www.teknoware.com/en/emergency-lighting-1/trail-line-lowbay-emergency-light-twsc192wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



