







DESCRIPTION


Lighting fixture with direct / indirect luminous flux distribution, aluminum housing and ral 9003 matt white finish.

FEATURES

| | |
|-----------------------------------------------------------------------------------|------------------------|
|  | Pendant |
|  | E14/LED |
|  | Lamp Included |
| IP20 | General |
|  | Glow-wire Resistance |
|  | 2014/30/EU, 2014/35/EU |
|  | 104.4 dm ³ |




ELECTRICAL SYSTEM

| | |
|-----------------------------------------------------------------------------------|---------------------|
| U_{IN} | 230V/50Hz |
| ON/OFF | On/Off Power Supply |
|  | Class I |

LED FEATURES

| | |
|-------------------------|---------------------------|
| 2700K | Colour Temperature |
| >80 | CRI |
| 20.000H @TC=25°C | Lifetime |
| L70 | Luminous Flux Maintenance |

DIMENSIONS

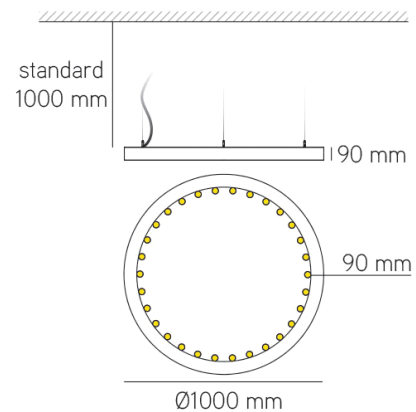

COMPONENTS



35.06.40.001634

S1 - Suspension 3 point
(1m) White



35.06.40.001635

S2 - Suspension 3
point (1m) + ceiling cup
White



35.06.40.001636

S3 - Suspension 1 point
(1m) + ceiling cup White

ENERGY EFFICIENCY

