




PURE

PURE Art

PURE S

PURE M


Narrow, medium and wide beam angles are available for different lighting applications

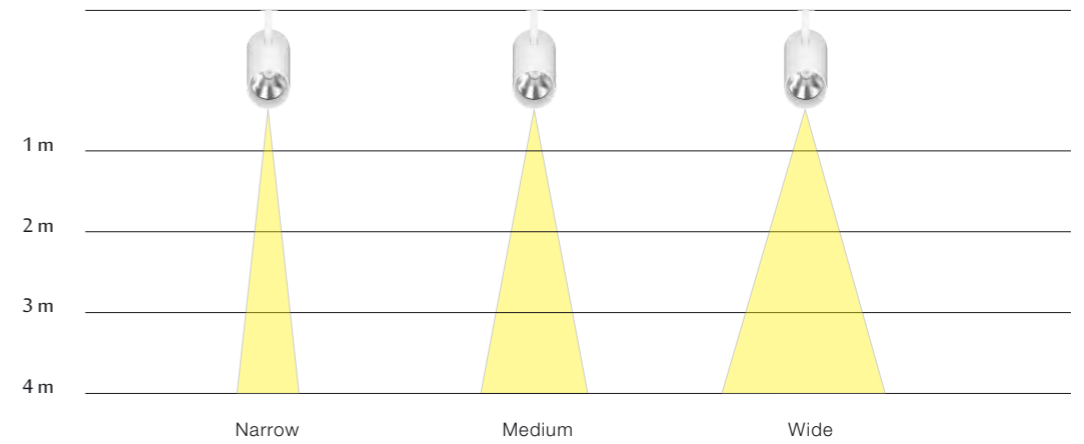

**NEKO / PUER Art**  
**LED Tracklight**



15W	CR190 CRI80	2700K 3000K 4000K	900lm 950lm 1000lm	18° 24° 36°	CITIZEN 50,000h@L80
IP 20	UGR < 19	CE	CB	5 GUARANTEE	



**Kurze Info**

- Drei-Phasen Stromschienenstrahler, POWERGEAR Adapter
- Integriertes LED – Netzteil
- 355° drehbar & 90° positionierbar
- beste Lichtatmosphäre für angenehmen und blendfreien Sehkomfort

**Short Info**

- 3-phase tracklight, POWERGEAR Adapter
- Internal LED driver
- 355° rotation & 90° pivot
- Excellent optical performance with maximum eye comfort

**Features**



·Specific rotation control 0-355°

·Anti-glare ring provide ultra lighting performance

**Order Information**



**PURE Art-15W**

CITIZEN LED powered by 350mA constant current LED driver, White fixture


Model	LED Power	System Power	CRI	CCT	BEAM	LED output	System output	Code
PURE Art-15W-930-18D	13 W	15 W	90	3000K	18°	1200 lm	950 lm	A2431C7W(X)
PURE Art-15W-940-18D	13 W	15 W	90	4000K	18°	1300 lm	1000 lm	A2431C8W(X)
PURE Art-15W-930-24D	13 W	15 W	90	3000K	24°	1200 lm	950 lm	A243197W(X)
PURE Art-15W-940-24D	13 W	15 W	90	4000K	24°	1300 lm	1000 lm	A243198W(X)
PURE Art-15W-930-36D	13 W	15 W	90	3000K	36°	1200 lm	950 lm	A243137W(X)
PURE Art-15W-940-36D	13 W	15 W	90	4000K	36°	1300 lm	1000 lm	A243138W(X)

Remark: X= F(ON-OFF)

**Optional accessory**




**Color finish**



**Light Distribution**

3000K

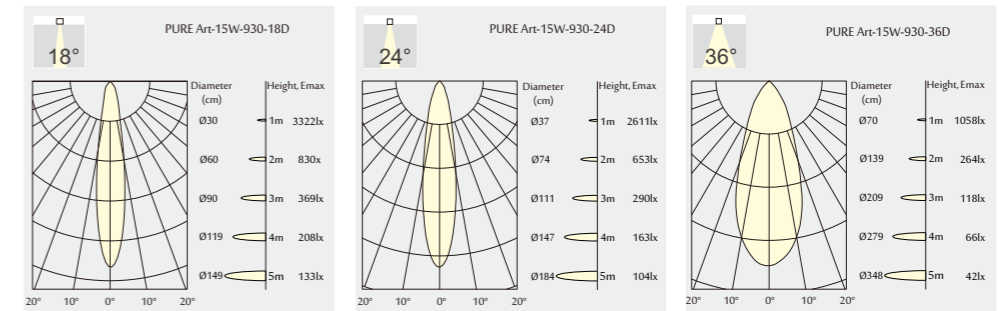


For more info see: [www.nekolighting.com](http://www.nekolighting.com)

**NEKO / PURE S**  
LED Tracklight



21W/15W	CRI90 CRI80	2700K 3000K 4000K	1650lm/1100lm 1700lm/1200lm 1800lm/1300lm	15°	25°	30°
	IP 20	UGR < 19				



**Kurze Info**

- Drei-Phasen Stromschienenstrahler, POWERGEAR Adapter
- Integriertes LED – Netzteil
- 355° drehbar & 90° positionierbar
- beste Lichtatmosphäre für angenehmen und blendfreien Sehkomfort

**Short Info**

- 3-phase tracklight, POWERGEAR Adapter
- Internal LED driver
- 355° rotation & 90° pivot
- Excellent optical performance with maximum eye comfort

**Features**



·Specific rotation control 0-355°

·Anti-glare ring provide ultra lighting performance

**Order Information**

**PURE S-15W**

CITIZEN LED powered by 350mA constant current LED driver, White fixture

Model	LED Power	System Power	CRI	CCT	BEAM	LED output	System output	Code
PURE S-15W-930-15D	13 W	15 W	90	3000K	15°	1500 lm	1200 lm	A2401B7W(X)
PURE S-15W-940-15D	13 W	15 W	90	4000K	15°	1600 lm	1300 lm	A2401BBW(X)
PURE S-15W-930-25D	13 W	15 W	90	3000K	25°	1500 lm	1200 lm	A2401D7W(X)
PURE S-15W-940-25D	13 W	15 W	90	4000K	25°	1600 lm	1300 lm	A2401D8W(X)
PURE S-15W-930-30D	13 W	15 W	90	3000K	30°	1500 lm	1200 lm	A240127W(X)
PURE S-15W-940-30D	13 W	15 W	90	4000K	30°	1600 lm	1300 lm	A240128W(X)

Remark: X= F (ON-OFF)

**PURE S-21W**

CITIZEN LED powered by 500mA constant current LED driver, White fixture

Model	LED Power	System Power	CRI	CCT	BEAM	LED output	System output	Code
PURE S-21W-930-15D	18 W	21 W	90	3000K	15°	2000 lm	1600 lm	A2412B7W(X)
PURE S-21W-940-15D	18 W	21 W	90	4000K	15°	2100 lm	1700 lm	A2412B8W(X)
PURE S-21W-930-25D	18 W	21 W	90	3000K	25°	2000 lm	1600 lm	A2412D7W(X)
PURE S-21W-940-25D	18 W	21 W	90	4000K	25°	2100 lm	1700 lm	A2412D8W(X)
PURE S-21W-930-30D	18 W	21 W	90	3000K	30°	2000 lm	1600 lm	A241227W(X)
PURE S-21W-940-30D	18 W	21 W	90	4000K	30°	2100 lm	1700 lm	A241228W(X)

Remark: X= F (ON-OFF)

**Optional accessory**




**Color finish**



**Light Distribution**

3000K

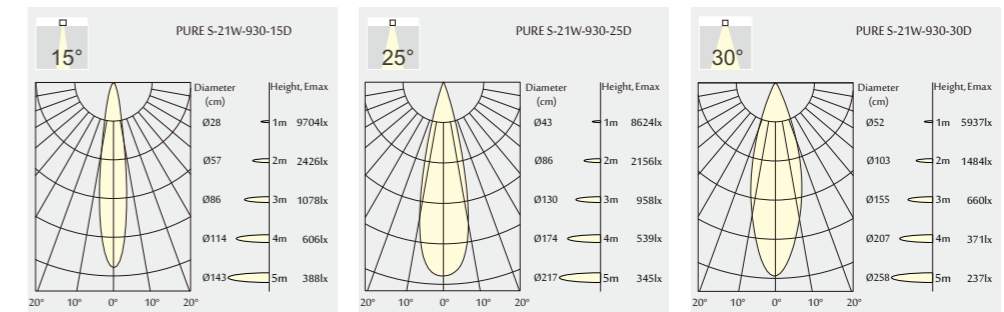


For more info see: [www.nekolighting.com](http://www.nekolighting.com)

**NEKO / PURE M**  
LED Tracklight



28W	CRI90	2700K	2600lm	18°	30°	45°
	CRI80	3000K	2700lm			
		4000K	2900lm			



**Kurze Info**

- Drei-Phasen Stromschienenstrahler, POWERGEAR Adapter
- Integriertes LED – Netzteil
- 355° drehbar & 90° positionierbar
- beste Lichtatmosphäre für angenehmen und blendfreien Sehkomfort

**Short Info**

- 3-phase tracklight, POWERGEAR Adapter
- Internal LED driver
- 355° rotation & 90° pivot
- Excellent optical performance with maximum eye comfort

**Features**



·Specific rotation control 0-355°

·Anti-glare ring provide ultra lighting performance

**Order Information**



**PURE M-28W**

CITIZEN LED powered by 700mA constant current LED driver, White fixture

Model	LED Power	System Power	CRI	CCT	BEAM	LED output	System output	Code
PURE M-28W-930-18D	25 W	28 W	90	3000K	18°	3400 lm	2700 lm	A2421C7W(X)
PURE M-28W-940-18D	25 W	28 W	90	4000K	18°	3600 lm	2900 lm	A2421C8W(X)
PURE M-28W-930-30D	25 W	28 W	90	3000K	30°	3400 lm	2700 lm	A242127W(X)
PURE M-28W-940-30D	25 W	28 W	90	4000K	30°	3600 lm	2900 lm	A242128W(X)
PURE M-28W-930-45D	25 W	28 W	90	3000K	45°	3400 lm	2700 lm	A242177W(X)
PURE M-28W-940-45D	25 W	28 W	90	4000K	45°	3600 lm	2900 lm	A242178W(X)

Remark: X= F (ON-OFF)

**Optional accessory**




**Color finish**



**Light distribution**

**3000K**

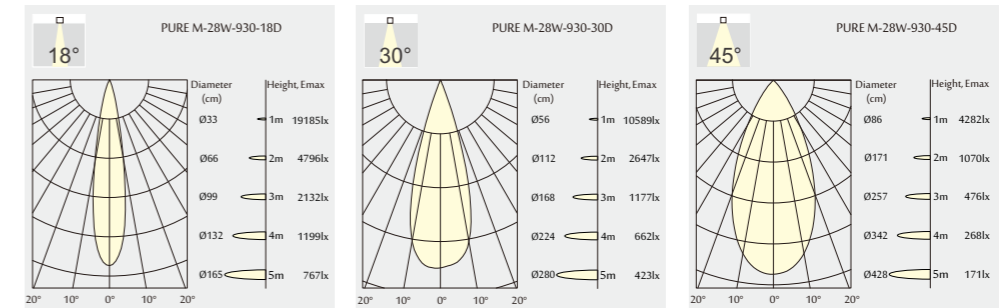

For more info see: [www.nekolighting.com](http://www.nekolighting.com)