


NEKO / FUSION / FG5
General LED Downlight



11W	CRI80 CRI90	2700K 3000K 4000K	380lm 400lm 450lm		50,000h@L80

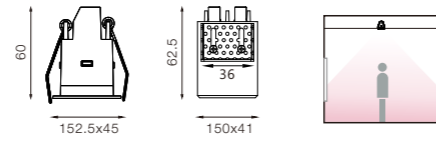


Kurze Info

- Gleichmäßige Allgemeinbeleuchtung
- Breiter Abstrahlungswinkel
- Quadratischer Einbaurahmen/ Rahmenlos

Short Info

- Uniform general lighting
- Wide beam angle general light
- Square trim/ trimless

Features



· Diffuser for general lighting



· Ceiling thickness: 1mm-25mm

Order Information

FG5-11W

CREE LED powered by 700mA constant current LED driver, White trim, Black reflector

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	LED output	System output	Code
FG5-11W-830	11 W	13 W	16 V	700 mA	80	3000K	1300 lm	400 lm	A652141(X)
FG5-11W-840	11 W	13 W	16 V	700 mA	80	4000K	1400 lm	450 lm	A652142(X)
FG5-11W-930	11 W	13 W	16 V	700 mA	90	3000K	1200 lm	370 lm	A652147(X)
FG5-11W-940	11 W	13 W	16 V	700 mA	90	4000K	1300 lm	400 lm	A652148(X)

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


FGT5-11W

CREE LED powered by 700mA constant current LED driver, White trimless, Black reflector

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	LED output	System output	Code
FGT5-11W-830	11 W	13 W	16 V	700 mA	80	3000K	1300 lm	400 lm	B652141(X)
FGT5-11W-840	11 W	13 W	16 V	700 mA	80	4000K	1400 lm	450 lm	B652142(X)
FGT5-11W-930	11 W	13 W	16 V	700 mA	90	3000K	1200 lm	370 lm	B652147(X)
FGT5-11W-940	11 W	13 W	16 V	700 mA	90	4000K	1300 lm	400 lm	B652148(X)


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Fixture color




Light Distribution

3000K



For more info see: www.nekolighting.com

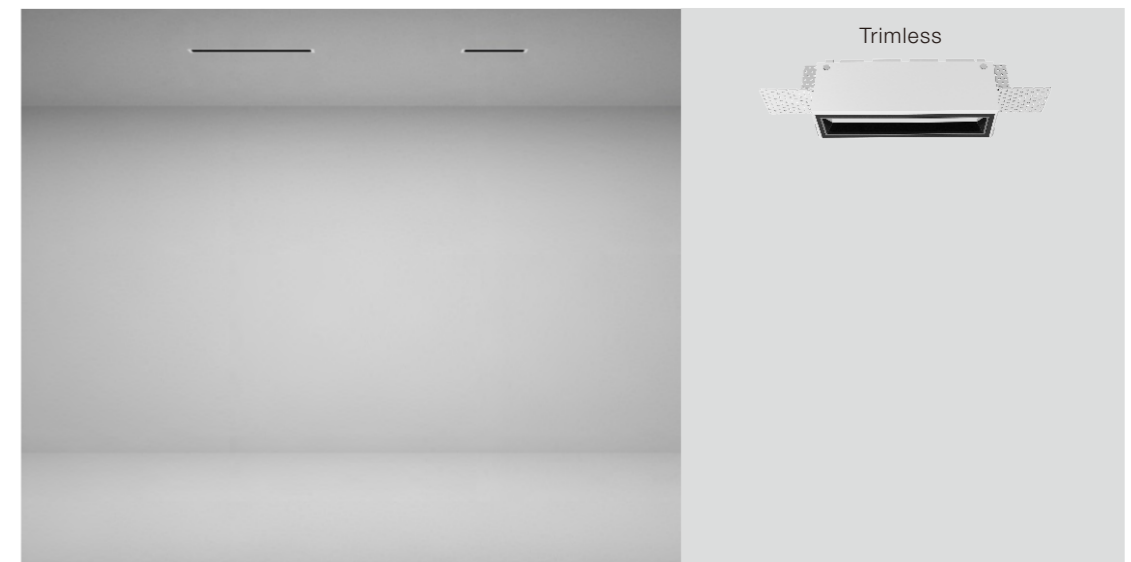


Trimless

NEKO / FUSION / FG10
General LED Downlight



22W	CRI80 CRI90	2700K 3000K 4000K	850lm 900lm 950lm		50,000h@L80

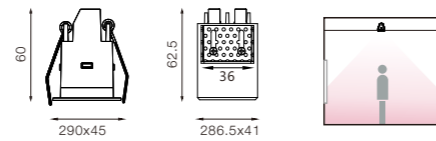


Kurze Info

- Gleichmässige Allgemeinbeleuchtung
- Breiter Abstrahlungswinkel
- Quadratischer Einbaurahmen/ Rahmenlos

Short Info

- Uniform general lighting
- Wide beam angle general light
- Square trim/ trimless

Features



· Diffuser for general lighting



· Ceiling thickness: 1mm-25mm

Order Information

FG10-22W

CREE LED powered by 700mA constant current LED driver, White trim, Black reflector

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	LED output	System output	Code
FG10-22W-830	22 W	24 W	31 V	700 mA	80	3000K	2600 lm	900 lm	A602141(X)
FG10-22W-840	22 W	24 W	31 V	700 mA	80	4000K	2800 lm	950 lm	A602142(X)
FG10-22W-930	22 W	24 W	31 V	700 mA	90	3000K	2300 lm	800 lm	A602147(X)
FG10-22W-940	22 W	24 W	31 V	700 mA	90	4000K	2500 lm	850 lm	A602148(X)

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


FGT10-22W

CREE LED powered by 700mA constant current LED driver, White trimless, Black reflector

Model	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	LED output	System output	Code
FGT10-22W-830	22 W	24 W	31 V	700 mA	80	3000K	2600 lm	900 lm	B602141(X)
FGT10-22W-840	22 W	24 W	31 V	700 mA	80	4000K	2800 lm	950 lm	B602142(X)
FGT10-22W-930	22 W	24 W	31 V	700 mA	90	3000K	2300 lm	800 lm	B602147(X)
FGT10-22W-940	22 W	24 W	31 V	700 mA	90	4000K	2500 lm	850 lm	B602148(X)


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Fixture color



Light Distribution

3000K



For more info see: www.nekolighting.com



Trimless