

TUPOLI-360 Suspended 70 LED 8W 3000K Opal 574mm

DESCRIPTION

- Luminaire with direct luminous flux distribution, opal polycarbonate diffuser and aluminium body e no finishing.






IP40

MAIN FEATURES

Weight (Kg)	0.9
Glow-wire Resistance	850°C
Control	Power Supply Not Included
Input	24V DC


TECHNICAL FEATURES


Luminous Flux Maintenance	L80
MAX Power (W)	8
Maximum Value (cd/Klm)	116
% ULOR	50
% DLOR	50
% LOR	100
LED Degradation/Mortality	F10
Total Flux (lm)	824
System Power (W)	8
Color Temperature	3000K
LED Efficiency	134 lm/W @Tc=65°C
Color Rendering Index (CRI)	>80
MacAdam Ellipse	3

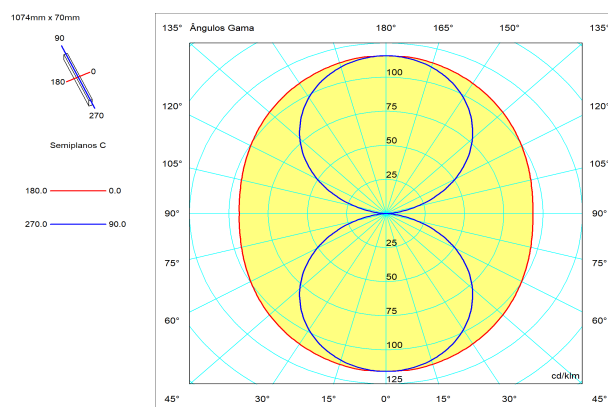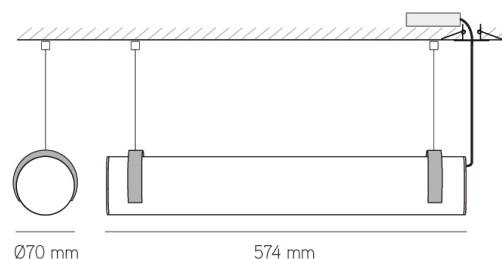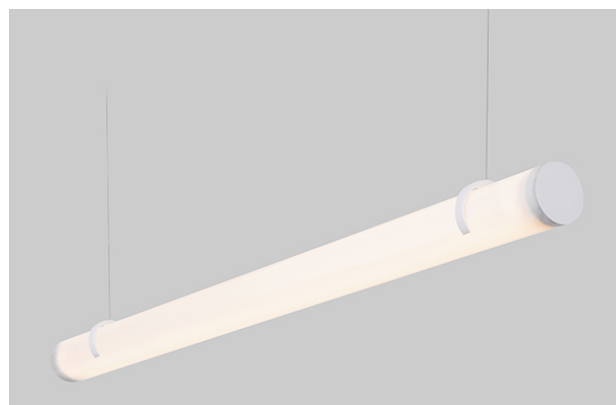

STANDARDS

DIRECTIVE 2011/65/EU of 8 June 2011 + COMMISSION DELEGATED DIRECTIVE (EU) 2015/863 of 31 March 2015 RoHS2
 DIRECTIVE 2014/30/EU of 26 February 2014
 EN 50581:2012 | EN 55015:2006+A1:2007+A2:2009 | EN 60335-1:2012 | EN 60598-1: 2014 | EN 60598-2-1: 1990 | EN 60598-2-13: 2006 | EN 60598-2-2: 2014 | EN 60598-2-22: 2014 | EN 60598-2-25: 2009 | EN 60598-2-4: 2017 | EN 61000-4-2:2009;EN 61000-4-3:2006 + A1:2008;EN 61000-4-4:2004;EN 61000-4-5:2006;EN 61000-4-6:2009 | EN 61547:2009
 LOW VOLTAGE DIRECTIVE 2014/35/EU of 26 February 2014

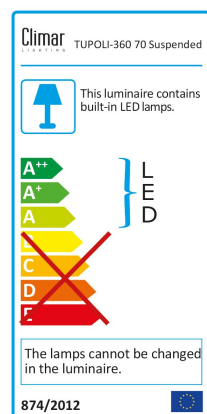

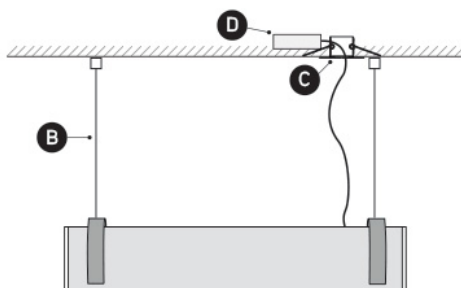

COMPONENTS



SUSPENSION SYSTEM

B	2xSuspension system/Sistema suspensão White 1000mm Tupoli 70	35.49.003.01.48
	2xSuspension system/Sistema suspensão White 5000mm Tupoli 70	35.49.002.08.76
	2xSuspension system/Sistema suspensão White 3000mm Tupoli 70	35.49.003.01.49



DRIVER

D	Power Supply Constant Voltage 24Vdc 18 - 135W IP20 DALI	35.00.003.01.77
	Power Supply Constant Voltage 24Vdc 12 - 86W IP20	35.00.003.01.73
	Power Supply Constant Voltage 24Vdc 6 - 49W IP20	35.00.003.01.74
	Power Supply Constant Voltage 24Vdc 12 - 90W IP20 DALI	35.00.003.01.76
	Power Supply Constant Voltage 24Vdc 4 - 32W IP20	35.00.003.01.75



RECESSED CEILING CUP

C	Recessed ceiling cup White Tupoli ON/OFF (5m) Ø80x2mm	35.49.002.08.71
	Recessed ceiling cup White Tupoli ON/OFF (1m) Ø80x2mm	35.49.001.08.31
	Recessed ceiling cup White Tupoli ON/OFF (3m) Ø80x2mm	35.49.002.08.63