

TUPOLI Suspended 70 IP65 TUBE1x22W(Max.)T8LED Clear 1324mm-C

DESCRIPTION

- Luminaire with, clear polycarbonate diffuser and e no finishing.






MAIN FEATURES

Glow-wire Resistance	850°C
Control	ON/OFF
Input	220-240V~/50-60Hz

TECHNICAL FEATURES

MAX Power (W)	
Maximum Value (cd/Klm)	221
% ULOR	
% DLOR	
% LOR	
Total Flux (lm)	2323
System Power (W)	16
Ambient Temperature (Ta)	-20°C - +35°C

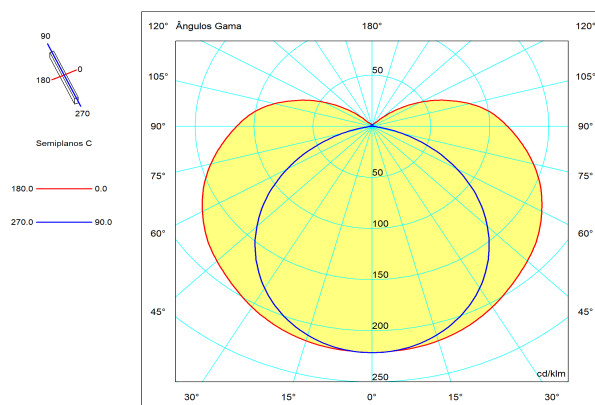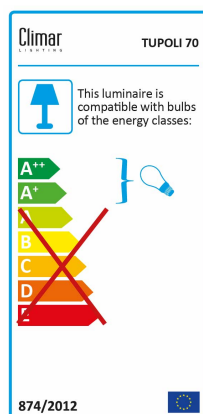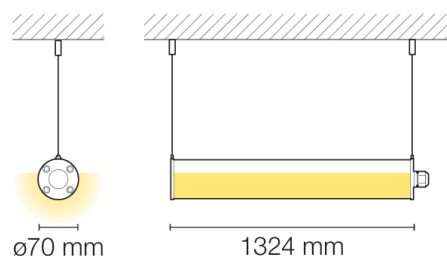

STANDARDS

DIRECTIVE 2011/65/EU of 8 June 2011 + COMMISSION DELEGATED DIRECTIVE (EU) 2015/863 of 31 March 2015 RoHS2
DIRECTIVE 2014/30/EU of 26 February 2014
EN 50581:2012 | EN 55015:2006+A1:2007+A2:2009 | EN 60335-1:2012 | EN 60598-1: 2014 | EN 60598-2-1: 1990 | EN 60598-2-13: 2006 | EN 60598-2-2: 2014 | EN 60598-2-22: 2014 | EN 60598-2-25: 2009 | EN 60598-2-4: 2017 | EN 61000-4-2:2009;EN 61000-4-3:2006 + A1:2008;EN 61000-4-4:2004;EN 61000-4-5:2006;EN 61000-4-6:2009 | EN 61547:2009
LOW VOLTAGE DIRECTIVE 2014/35/EU of 26 February 2014