
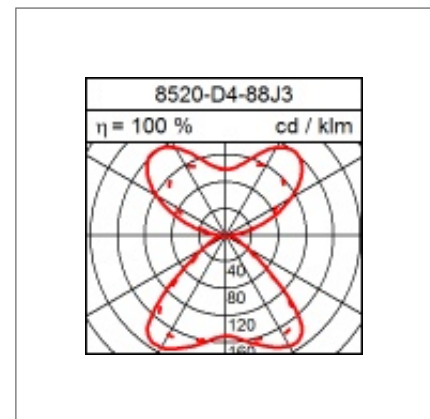


Technical Data

LED Standard lamp PROP

95.3W LED, 9257 Lumen, 3000 Kelvin. IP40. With ecru anodized aluminium frame. Cover with microprismatic light guidance, direct-indirect luminous. Stand pipe and foot plate laquered in matted aluminium colour. Luminaire head closed. With 3 m of cable connection. Stand pipe brought out of centre. Switchable and dimmable with switch. With sensor technology.

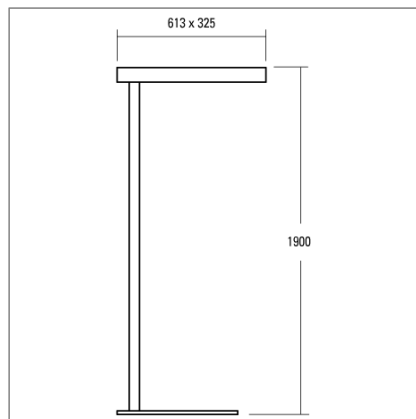

Product data

| | |
|-------------------------|--|
| Item number | 8520-D4-88J3 |
| Dimensions | L=615 / B=325 / H=1900 |
| Lamp | LED |
| Equipment | 83.1W |
| System output | 95.3W |
| Ballast | |
| Assemblypoints Distance | |
| Weight | |
| Safety signs |      |

Light data

| | |
|-------------------------------|-------------|
| Optical Light Output Ratio | 100 % |
| Light direct/non direct Ratio | 45 % / 55 % |
| Absolute luminous flux | 9257 lm |
| Lightoutput (lm/W) | 97.14 |

Glare rating UGR

X=4H, Y=8H, S=0,25H
 Deg. of reflection 70/50/20

| | |
|---------------------|------|
| Perpendicular Zero | 15.6 |
| Perpendicular Ninty | 15.4 |